

# GDD201 - GDD201C

TOWER SYSTEM  
WITH DOUBLE TUMBLE DRYERS  
FROM SmallPRO RANGE



## TOWER TUMBLE DRYERS Small PRO RANGE

### Caratteristiche

- Galvanized steel cylinder
- Oversized lint filter located in front for easy cleaning
- Powerful exhaust blower assures short drying times and low operating costs
- Wide door opening of 180° for easy loading and unloading. Reversing opening even while already installed
- Ergonomic control panel with 45° tilt
- Top, front and side panels standard available in anthracite grey
- Electrical or gas heating
- 4 drying programs
- LED indication of the status of the program
- Time remaining countdown
- Coin op version on option

### Opzioni

- Self-service version with connectable central payment unit
- For self-service versions please refer to the model GDD201C

## PC programming optional

Drying diagrams complete customization. The transfer data is made via infrared communication kit that prevents the access inside the equipment to enable communication.

Audit of working data like performed programs and alarm history, all reported to date and time of the event that are constantly stored.



## Models GDD

		GDD201	GDD201C
Ratio capacity	1:20	2 x 9.9	2 x 9.9
Drum dimensions	Diameter (mm)	655	655
	Depth (mm)	550	550
	Volume (dm³)	2 x 198	2 x 198
Door dimensions	Rounded shapes (mm)	530 x 425	530 x 425
Velocità cesto	rpm	50	50

### Net dimensions and packing


		GDD201	GDD201C
Net dimensions	Width (mm)	683	683
	Depth (mm)	711	711
	Height (mm)	1986	1986
Packing dimensions	Width (mm)	737	737
	Depth (mm)	832	832
	Height (mm)	2152	2152
	Volume (m³)	1.32	1.32
Net / Gross weight	kg	120 ÷ 127 elettrico	120 ÷ 127 elettrico
		125 ÷ 132 gas	125 ÷ 132 gas

### GAS models data

		GDD201	GDD201C
Power supply	V / ph / Hz	230-240V 1~50Hz	230-240V 1~50Hz
		230-240V 3~50Hz	230-240V 3~50Hz
		<b>380-415V 3N~50Hz</b>	<b>380-415V 3N~50Hz</b>
Thermal power	kW	2 x 5.3	2 x 5.3
Motor power	kW	2 x 0.25	2 x 0.25
Total electric power	kW	2 x 0.25	2 x 0.25
Fuse	A	10	10
Exhaust	Diameter (mm)	2 x 100	2 x 100
Noise	dB	<52	<52

### Electric models data

		GDD201	GDD201C
Power supply	V / ph / Hz	230-240V 1~50Hz	230-240V 1~50Hz
		230-240V 3~50Hz	230-240V 3~50Hz
		<b>380-415V 3N~50Hz</b>	<b>380-415V 3N~50Hz</b>
Thermal power	kW	2 x 5.35	2 x 5.35
Motor power	kW	2 x 0.25	2 x 0.25
Total electric power	kW	2 x 5.6	2 x 5.6
Fuse	A	<b>20 ÷ 30 ÷ 50</b>	<b>20 ÷ 30 ÷ 50</b>
Exhaust	Diameter (mm)	2 x 100	2 x 100
Noise	dB	<52	<52

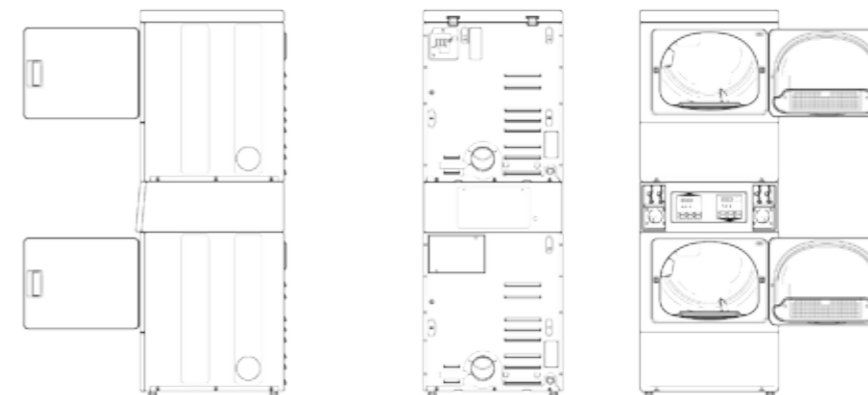

GDD201 - GDD201C 201607 rel.0.2 REF GR00000000H146

The manufacturer declines all responsibility for any inaccuracies contained in this catalogue. The manufacturer reserves the right to bring, without warning, any modifications he might believe necessary, without changing the essential characteristics of the product.

**grandimpianti i.l.e - Ali spa**  
via masiere, 211/c - 32037 sospiolo (BL) Italy  
ph. +39 0437 848 711 - fax +39 0437 879 108  
www.grandimpianti.com - info@grandimpianti.com



COMPANY WITH  
MANAGEMENT SYSTEM  
CERTIFIED BY DNV GL  
= ISO 9001 =  
= ISO 14001 =

an Ali Group Company



The Spirit of Excellence